


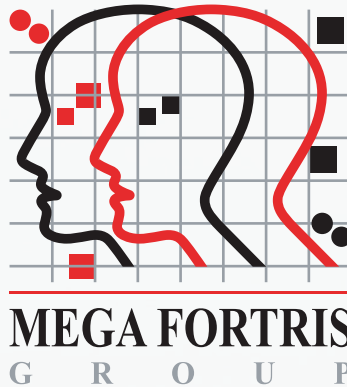

INDICATIVE SEAL

FAST SEAL (FS)

Pull-Tight Seal

Versatile security seal for various industry needs.

Fast Seal is the icon in the indicative family. It offers various options for strap length to complement the different applications. Its slim round strap makes it suitable for small hole latches. This is the most versatile choice for security and authentication purposes. These seals include the BioSphere bio-additive.

To provide eco-conscious solutions on a wide array of applications, all Mega Fortris' security seal product lines with plastic content will include the BioSphere bio-additive from 13th May 2024.

Applications:


- Retail Applications
- Authentication Tagging
- Logistics
- Banking



Our biodegradable plastic additives go deeper, allowing microbes to consume the C-C bonds within plastic's structure at a macromolecular level. This increases the surface area of plastic products and enables plastophilic microbes to attach to the polymer's newfound cavities. So, unlike regular plastic that can sit in a landfill for hundreds or thousands of years, plastic enhanced with BioSphere attracts over 600 different types of microbes that effectively digest and consume it.

PREVENTION • PROTECTION • PEACE OF MIND




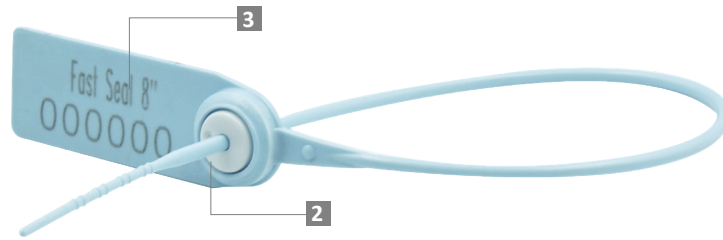


LASER MARKING OPTION



VIEW APPLICATION VIDEO



- 1 The Fast Seal is moulded with Cold Weather Polypropylene (CWPP) or high-impact Nylon (NY) material with the metal lock heat staking encapsulated for greater security and clear evidence of tampering.
- 2 One-way locking mechanism is embedded for fast and easy application.
- 3 Irreversible identifiers such as name, logo, barcode, serial number and QR code are laser-marked on the flap.
- 4 These seals include the BioSphere bio-additive.
- 5 Different strap lengths are available to cater to different applications.
- 6 Tear-off (TO) variation available in 5" and 8" for easy removal.

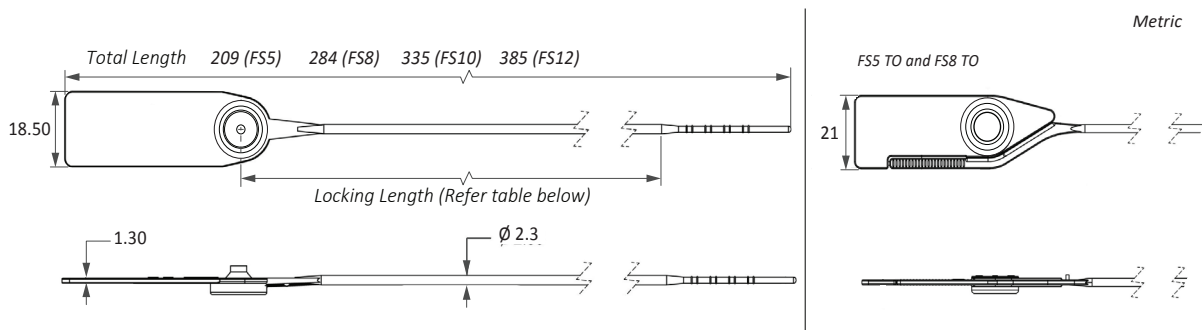

TECHNICAL SPECIFICATIONS

PRODUCT - FAST SEAL (FS)

Code	Material	Locking Length (mm)	Locking Size (mm)	Tensile Strength (kgf)	Marking Area (mm)	Max Marking Digits
FS5	Plastic : Cold Weather Polypropylene (CWPP): 99% Biodegradable Additive: 1% Temperature Range: -20°C to 80°C	127 (5 in)	Ø 2.3 (0.1 in)	CWPP: ≥15 (≥33.1 lbf) NY: ≥18 (≥39.7 lbf)	14 x 34 (0.6 x 1.3 in)	Serial no : 13 Barcode : 12
FS8		203 (8 in)				
FS10		254 (10 in)				
FS12	Metal Jaw : Stainless Steel (SUS 304)	305 (12 in)				

PACKAGING

Carton	Quantity	Dimensions (mm)	Gross Weight (kg)	Volume (m ³)	Standard Pastel / Solid Colours
FS5 Inner	1000	279 x 225 x 190 (11.0 x 8.9 x 7.5 in)	2.3 - 2.65 (5.1 - 5.8 lb)	0.012 (0.4 cu.ft.)	Polypropylene : Body : WH PSYL PSOR PSRD PSBL PSNG BK Cap : WH FR Nylon : Body : WH B YL G RD BK Cap : WH FR For colour customisations, kindly contact us for further information.
FS8 Inner			2.68 - 3.01 (5.91 - 6.64 lb)		
FS10 Inner		450 x 195 x 165 (17.7 x 7.7 x 6.5 in)	2.61 - 3.17 (5.75 - 6.99 lb)	0.014 (0.5 cu.ft.)	
FS12 Inner			3.14 - 3.25 (6.92 - 7.17 lb)		

Updated Date : 6 November 2025